Regulator

Tech Master GPL400 Series

4.5 Purity Single Stage Brass Barstock Diaphragm Line Regulator



The Tech Master GPL400 Series single stage diaphragm line regulators are designed for secondary pressure gas control of non-corrosive or toxic, technical gases up to grade 4.5 purity (99.995%), on gas distribution systems.

- **GPL400** Series | Single Stage Diaphragm Line Regulator

FEATURES

- Four port configuration
- Rear panel mounting capabilities
- Encapsulated seat design
- Low wetted surface area
- Full range of inlet and outlet fittings


MATERIAL

Body	Brass Barstock
Bonnet	High Strength Alloy
Diaphragm	Polychloroprene (Neoprene®) (CR)
Seat	Polyamide (Nylon®)
Filter	10 Micron 316L Stainless Steel

SPECIFICATION


Maximum Inlet Pressure	60 bar (870 PSI)
Delivery Pressure Range	1.5 bar (22 PSI)
	3.5 bar (50 PSI)
	6 bar (90 PSI)
	10 bar (150 PSI)
Gauges	50mm (2") Diameter
Ports	1/4" NPT Female
Temperature Range	-20° C to +60° C (-4° F to +140° F)
Weight	1.1 kg (2.5 lb)

FLOW PERFORMANCE

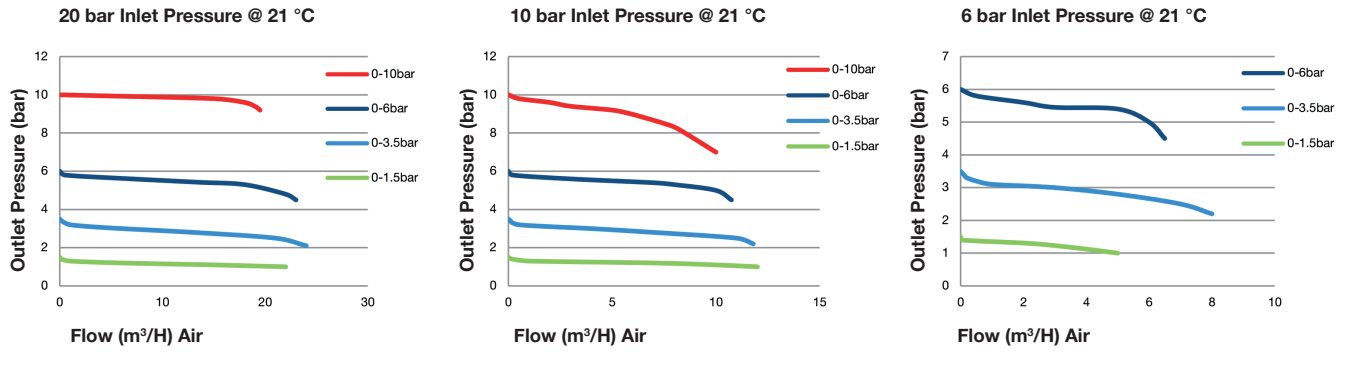

We do everything we can to ensure that the technical information within this document is correct at time of publishing, however content may be changed without notice.

DRAWINGS

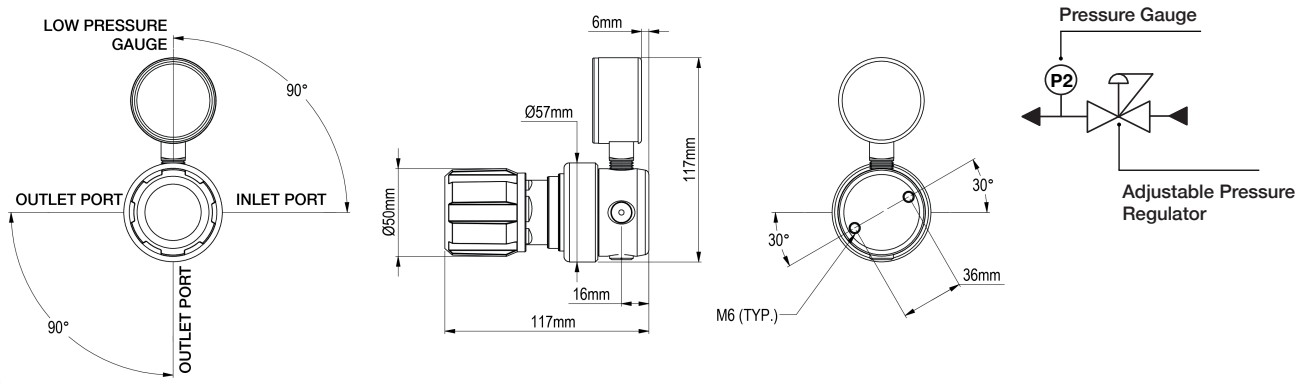

MODEL NO. SELECTOR GUIDE

Example for a Model No. for GPL400 Series

GPL400- 02- 02- 00- 00- 000- 00- A

Product Type	Inlet Pressure Bar [PSI]	Outlet Pressurek Bar [PSI]	Inlet Pressure Gauge	Outlet Pressure Gauge	Inlet/Cylinder Connection	Outlet Connection	Options
GPL400	**02** 60 [870]	**02** 0 to 1.5 [22]	**00** No Gauge Fitted	**00** No Gauge Fitted	**000** 1/4 NPT Female	**00** 1/4 NPT Female	**A** No Options Selected
		03 0 to 3.5 [50]		**01** bar/PSI	**001** 1/8 Stainless Steel Compression	**01** 1/8 Stainless Steel Compression	**K** Certificate of Conformity
		04 0 to 6 [90]		**10** Plugged Port	**002** 1/4 Stainless Steel Compression	**02** 1/4 Stainless Steel Compression	**P** Calibration/ Pressure Test Certificate
		05 0 to 10 [150]			**003** 6mm Stainless Steel Compression	**03** 6mm Stainless Steel Compression	**X** Special Instruction
					004 1/4 NPT Male	**04** 1/4 NPT Male	
					006 G1/2 BSP R/H, Brass, Male	**05** 1/4 SAE Flare Brass Male	
					007 G3/8 BSP R/H Brass Male	**06** G1/2 BSP R/H, Brass, Male	
					008 G3/8 BSP L/H Brass Male	**07** G3/8 BSP R/H, Brass, Male	
						08 G3/8 BSP L/H, Brass, Male	
						09 Isolation Valve, 1/4 NPT Female, FKM Seal	
						10 Isolation Valve, 1/4 NPT Female, EPDM Seal	
						11 Isolation Valve, 1/8 Stainless Steel Compression, FKM Seal	
						12 Isolation Valve, 1/8 Stainless Steel Compression, EPDM Seal	
						13 Isolation Valve, 1/4 Stainless Steel Compression, FKM Seal	
						14 Isolation Valve, 1/4 Stainless Steel Compression, EPDM Seal	
						15 Isolation Valve, 6mm Stainless Steel Compression, FKM Seal	
						16 Isolation Valve, 6mm Stainless Steel Compression, EPDM Seal	
						17 Isolation Valve, 1/4 NPT Male, FKM Seal	
						18 Isolation Valve, 1/4 NPT Male, EPDM Seal	
						19 Isolation Valve, G3/8 BSP R/H Brass Male, FKM Seal	
						20 Isolation Valve, G3/8 BSP R/H Brass Male, EPDM Seal	
						21 Isolation Valve, G3/8 BSP L/H Brass Male, FKM Seal	
						22 Isolation Valve, G3/8 BSP L/H Brass Male, EPDM Seal	

GCE® Gas Control Equipment

CK Isotopes Ltd, Office 1&2, The Stables, Newtown Grange Farm Buisness Park, Desford Road, Newtown Unthank, Leicestershire, LE9 9FL

WWW.GASCONTROLEQUIPMENT.CO.UK - Tel: 01455 360180 - Email: SALES@CK-GCE.CO.UK

GASARC BY GCE SPECIALITY

Headoffice / Factory UK

Gas-Arc Group Limited

Vinces Road | Diss | Norfolk | IP22 4WW | UK